



TD23-DO POWERLOCK III™ COMBINATION GRAVITY TILT-DECK TRAILER SPECS



EXCLUSIVE STANDARD ADDED VALUE:

- POWERLOCK III™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
 - SAFETY and Peace of Mind
 - No Pins, Cotters, or Lanyards that Secure the Tilt Deck (which is the most critical safety point).
 - Faster Loading, Unloading, and Deployment Reduces Labor Costs and Fatigue on Workers.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES: 33,000 lbs. GVWR @ 10% Tongue Weight

AXLES: Tandem 15K lbs. Sprung

WHEELS: (8) 17.5 x 6.75HC, 10 on 275mm BC, 5.60 Outset Wheel

TIRES: (8) 215/75R17.5 LR-H Tires

BRAKES: 12.25" x 5.00" Electric Brakes

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

PAYLOAD CAPACITY: 23,600 Lbs. Approx.

OVERALL LENGTH: 40'

OVERALL WIDTH: 102.00"

OVERALL WEIGHT: 9,400 lbs. Approx.

(Actual Trailer Weight will Vary with Options & Finishes Chosen)

STANDARD FEATURES

- POWERLOCK III™ Auto-Locking Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes

STANDARD TRAILER BODY

- Heavy Duty 8" X 3" X ¼"
- 6-Position Adjustable Hitch
- ½" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- 12,000 lbs. Static Front Jack w/ Spring Return
- A-frame: Approx. 64" Long

WIRING

- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- Biodegradable Pretreat Acid Cleaning (Superior to re-used sandblasting material that can impregnate metals with oil)
- Seams Caulked

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

PAINT (cont.)


- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant Plastic Control Placard. (Electric Start Optional)
- 12V Electric Over Hydraulic Power System.
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- Aluminum or Steel Toolbox
- 4 x 5,000 Lbs Removable Reel Stands w/ Ultra-Low Friction, High Impact Nylatron Reel Bar Saddle
- 4 x Removable 60" Width Pole Bunks 5" H-Beam Pole Seat
- Hydraulic Front Jack
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Solar Charged Breakaway Kit
- Strobe Warning Lights
- All Stainless Steel Fasteners (½" and under)
- Truck-Lite Lighting
- Lug Nut Indicators
- 3" Lunette Eye
- 10' Attachment / Accessory Rack

IF REEL STAND/S ARE CHOSEN THE FOLLOWING OPTIONS ARE POSSIBLE

- 3,300 ft/lbs Torque Hydraulic Take-up Retriever. (Motor Spooled w/ Reel Brake ILO Cross-Over Relief Valve for Smooth Instant Reel Stoppage)
- 16" Bronze Alloy Ventilated Reel Brake w/ Ventilated Guard
- Conical Lifting Lug Package for 2.50" Reel Bars
 - "Precision Machined" CONICAL centering collar w/ lift lug (Yellow Zinc Plated)
 - Removable sliding "Precision Machined" CONICAL drive bar cone (Yellow Zinc Plated)

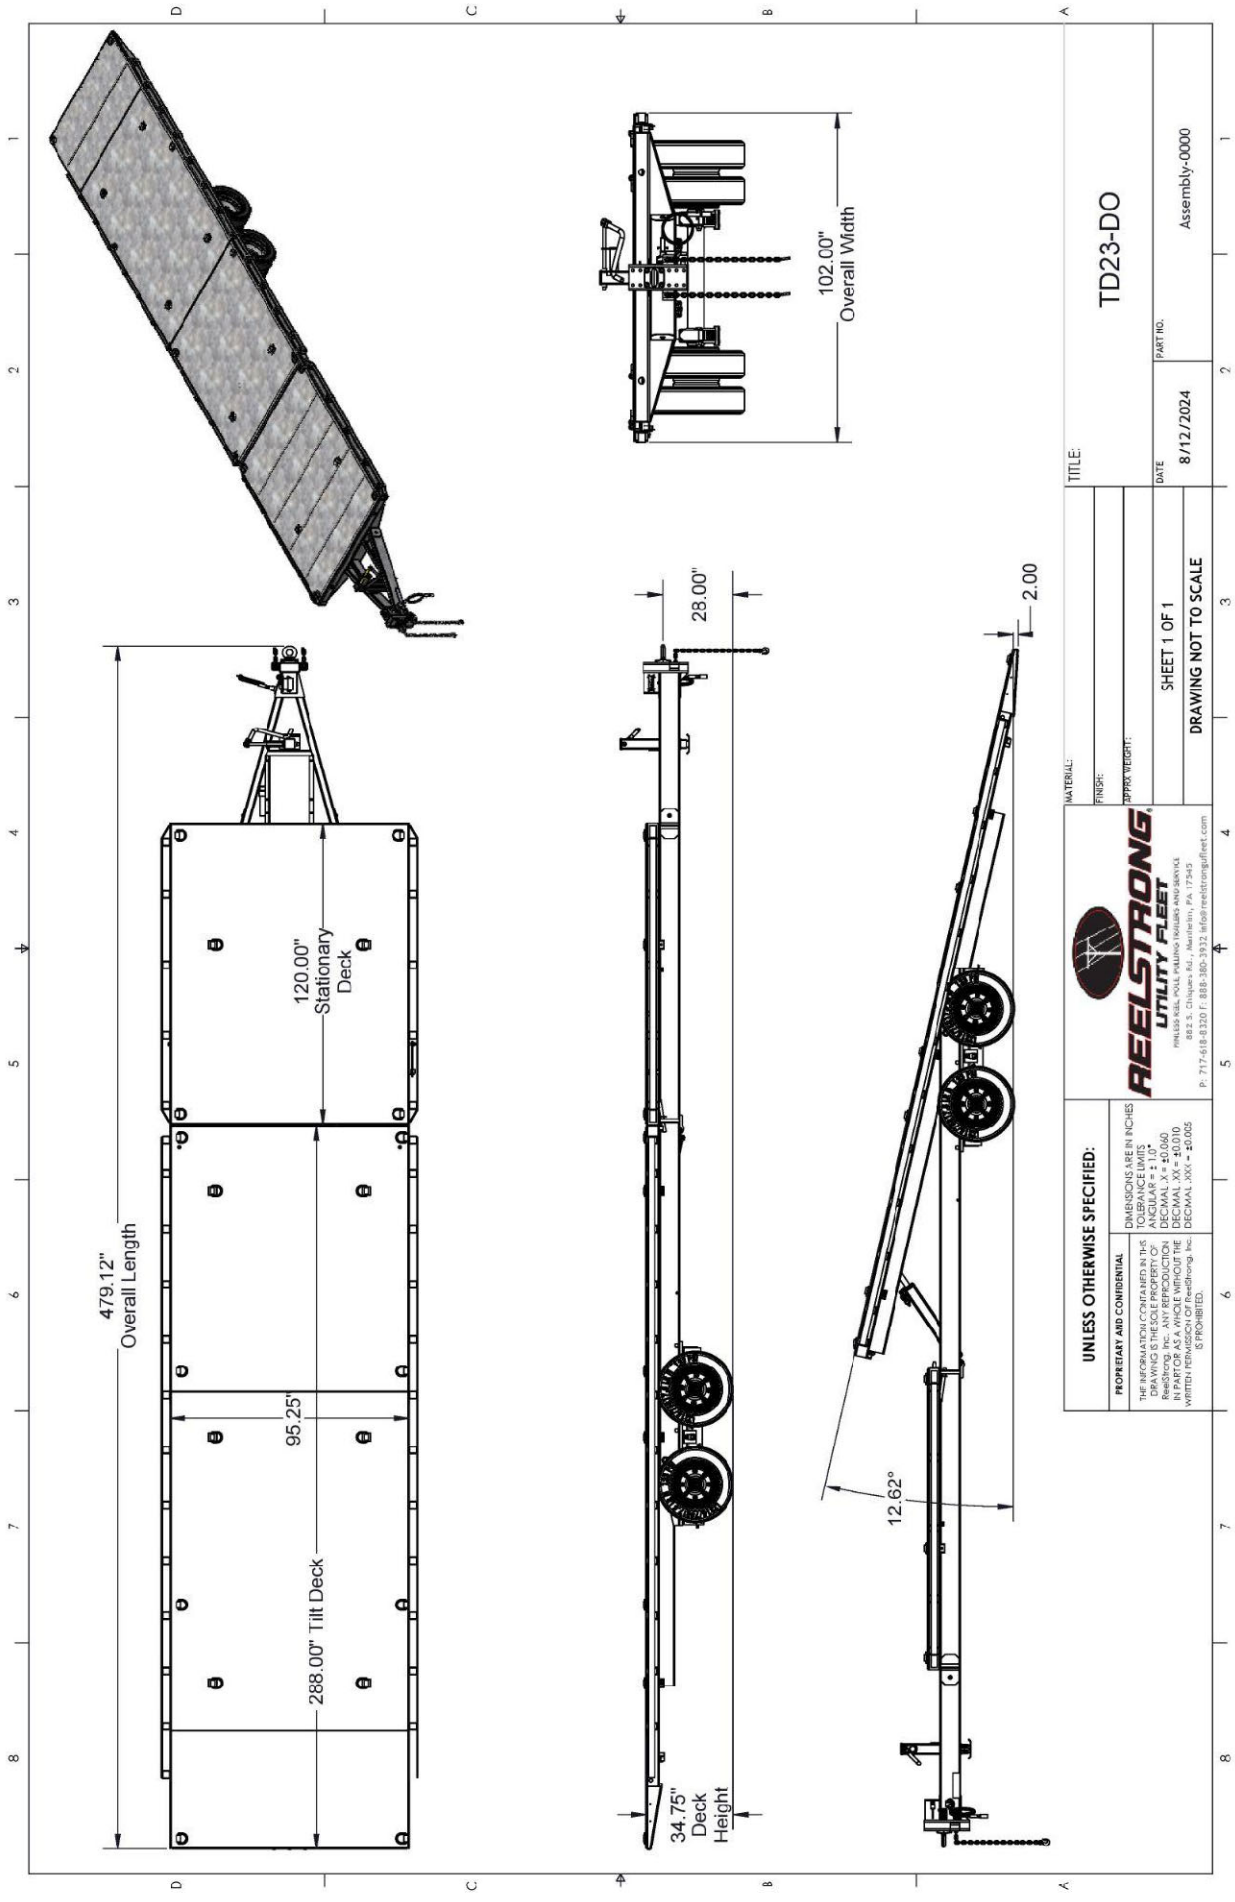

UNLESS OTHERWISE SPECIFIED:

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG, INC. ANY REUSE OR REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Reelstrong, Inc. IS PROHIBITED.

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

REELSTRONG[®]

UTILITY FLEET

882 S. Clarks Rd., Mantoloking, PA 17343

P: 717-618-8320 F: 888-380-3932 info@reelstrongfleet.com

TITLE: TD23-DO		
PART NO. Assembly-0000		
DATE 8/12/2024		
SHEET 1 OF 1		
DRAWING NOT TO SCALE		